



THERMIC-WELDED TIGHT BELLOWS

They are used when watertight protection of the components (i.e. screws, shafts, etc.) is necessary against the contamination made by coolants.

- Economic bellows
- Good resistance to chemicals
- Resistance to heat compatible with the used materials (see characteristics on pages 56-57)
- They can be supplied in a variety of geometrical shapes, with low cost production of moulds (if not already present in our stock).

• **Materials available:**

Code TEMAT 018

Code TEMAT 019

Code TEMAT 153

See the characteristics shown in the tables on pages 56-57.




Reproduction of this page is strictly prohibited.



SEWN ROUND BELLOWS

These are used when strong rotation resistance is required (for instance, to cover ball screws) and where a very compact closed pack is required.

- Highly **reliable** bellows
- High resistance to mechanical and dynamic **stress**
- Resistance to **coolants and oils**
- Suitable for **high temperatures**
- Available with guide **bushings** and reinforcement **rings**
- No tooling **costs**
- With selected **edging** (in safety colors upon request)
- Minimum internal diameter **starting at 20 mm**
- **Any size** external diameter
- Good **price/quality** ratio

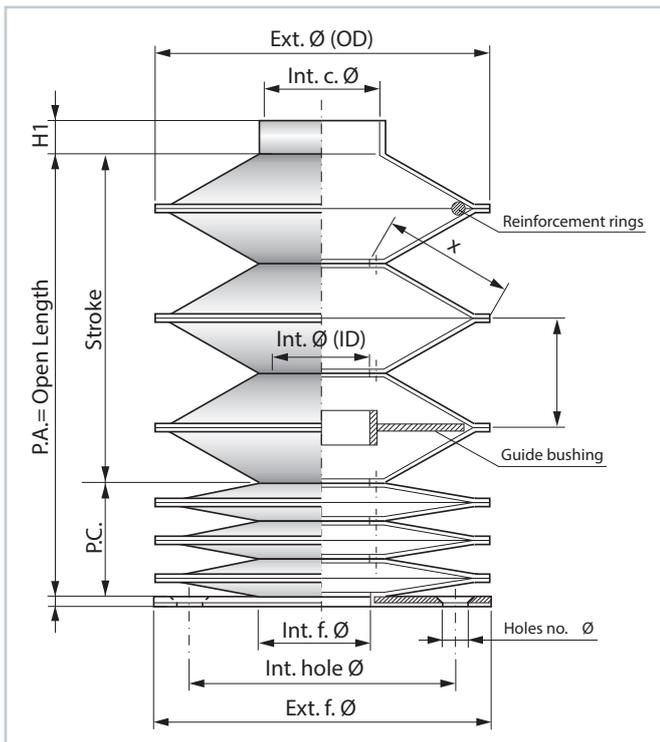

Reproduction of this page is strictly prohibited.

Materials available:

- Polyester coated with Neoprene* and Hypalon*
- Polyester coated with Nitril rubber
- Polyester coated with Polyurethane
- Polyester coated with PVC
- Kevlar* coated with Neoprene* and Hypalon*
- Kevlar* coated with Polyurethane
- Fiberglass coated with Silicone and Neoprene*
- Fiberglass coated with PVC
- Aluminum-coated fabrics

* Neoprene, Hypalon and Kevlar are registered Dupont trademarks

(see materials list on pages 56-57)

Formula for calculating the CLOSED LENGTH

$$P.C. = \text{Closed Length} = NP \cdot SP^*$$

$$NP = \text{Number of folds} = \frac{P.A.}{AP} + 1$$

* **SP** = Thickness of 1 fold; see materials list on pages 56-57

$$AP = \text{Opening of 1 fold} = \left(\frac{\varnothing e. \text{ soff.} - \varnothing i. \text{ soff.} - 6}{2} \right) \cdot 1,2$$


Note: When steel rings are required inside the folds, the **P.C.** is calculated by our engineering department.



HEAT-FORMED BELLOWS

These are used when high mechanical strength and heat resistance are required.

- Excellent resistance to **mechanical stress**
- Also available cone-shaped
- Resistance to **coolants and oils**
- No tooling **costs**
- Available with guide **bushings** and **reinforcement rings** upon request
- Suitable for **high temperatures**

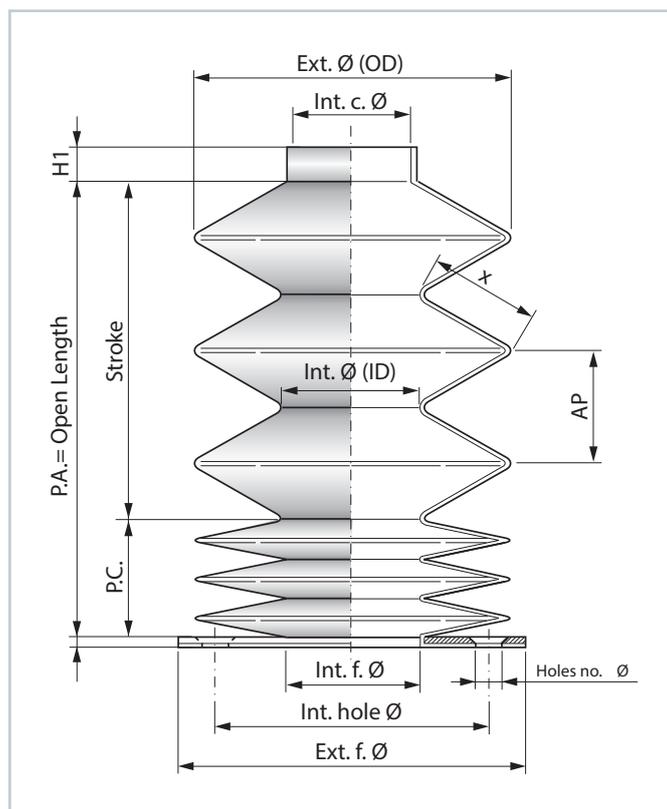

OPEN HEAT-FORMED BELLOWS

Materials available:

- Polyester coated with Neoprene* and Hypalon*
- Polyester coated with Nitril rubber
- Polyester coated with Polyurethane
- Polyester coated with PVC
- Fiberglass coated with Silicone and Neoprene*

* Neoprene and Hypalon are registered Dupont trademarks

(see materials list on pages 56-57)



Reproduction of this page is strictly prohibited.

Formula for calculating the CLOSED LENGTH

$$P.C.= \text{Closed Length} = NP \cdot SP^*$$

$$NP = \text{Number of folds} = \frac{P.A.}{AP} + 1$$

* SP= Thickness of 1 fold; see materials list on pages 56-57

$$AP = \text{Opening of 1 fold} = \left(\frac{\varnothing e. \text{ soff.} - \varnothing i. \text{ soff.}}{2} \right) \cdot 1,41$$

Note: When steel rings are required inside the folds, the P.C. is calculated by our engineering department.

