

## Oil level sight glasses

with prismatic window, technopolymer up to 100°C

### MATERIAL

Transparent polyamide based (PA-T) technopolymer. Avoid contact with alcohol or detergents containing alcohol.

The window consists of a continuous series of prisms which provide a clear and immediate reading of the level of the oil contained in the reservoir.

### PACKING RING

NBR synthetic rubber.

### MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.

### TECHNICAL DATA

The tightening torque indicated in the table guarantees an optimal tightness, keeping the packing ring in the correct position.

### NOTE


For use with other fluids with special additives, please contact ELESA Sales Department.

### ACCESSORIES ON REQUEST

Brass nut type GH. (see page -) for fitting to reservoirs with wall thickness smaller than 5 mm.



ELESA Original design

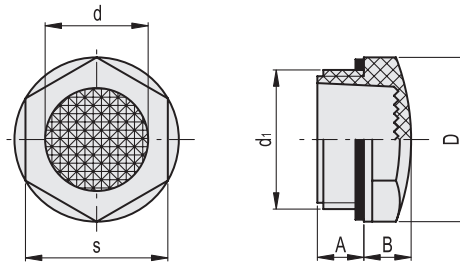

Code	Description	d <sub>1</sub>	A	B	D	d	s	Tightening torque [Nm]	⚖️
13652	HFTX.9/PR-1/4	G1/4	10	6	18	9	15	2÷3	3
13672	HFTX.12/PR-3/8	G3/8	7.5	7	22	11	19	3÷5	4
13692	HFTX.15/PR-1/2	G1/2	10.5	8	26	14	22	4÷6	5
13722	HFTX.20/PR-3/4	G3/4	10.5	9	31.5	20	27	6÷8	8
13742	HFTX.24/PR-1	G1	11	10	40	25	34	8÷10	12