

## Levelling feet for ground mounting

technopolymer base, SUPER-technopolymer joint

### BASE

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

### BALL JOINT

Glass-fibre reinforced polyamide based (PA) SUPER-technopolymer, black colour.

### STANDARD EXECUTIONS

- **LV.FO+SJF**: without no-slip disk.
- **LV.FO-AS+SJF**: with NBR rubber no-slip disk, hardness 70 Shore A, supplied assembled to the base.

### FEATURES AND APPLICATIONS


The special knurling under the base edge that rests on the ground provides excellent grip and stability on uneven surfaces even without the no-slip disk. The particular assembling system of the no-slip disk to the base assures a perfect anchoring, preventing separation even in case of impact during transport or of adhesion (sticking) to the floor (see No-slip disk). Used for direct fixing using standard screws, without the need for a threaded stem.

### GROUND MOUNTING


By means of two holes, supplied closed by a diaphragm (which can be easily removed by a metal tool) to avoid all unhealthy deposits of dirt and dust (see Fig. 1).

### ANOTHER STANDARD EXECUTION

SJF: ball joint.



LV.FO+SJF

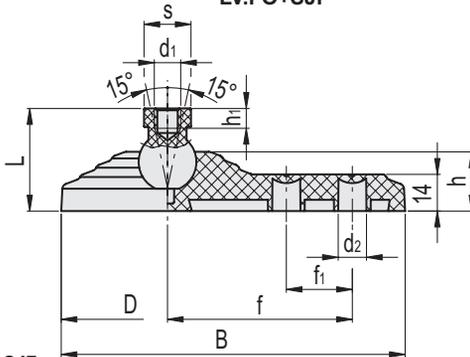

LV.FO+SJF



ELESA Original design

Break the diaphragm

Make a hole


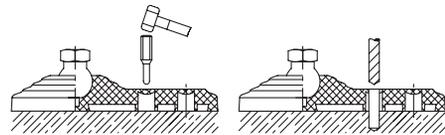


Fig.1

LV.FO-AS+SJF

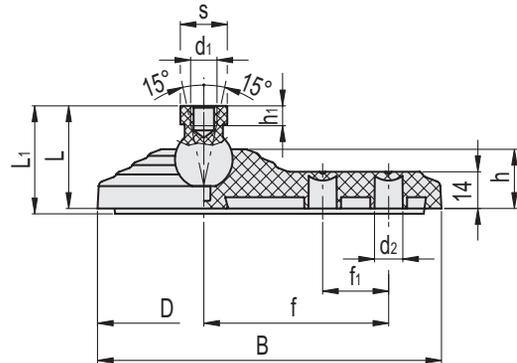

Code	Description	D	d1	L	d2	h	h1	B	f	f1	s	Articulation Ø	Maximum tightening torque for the screw [Nm]	Max. limit static load* [N]	⚖️
300166	LV.FO-60-14+SJF-M6	60	M6	31.5	8.5	21	10	96.5	50	18	16	14	4	5800	54
300167	LV.FO-60-14+SJF-M8	60	M8	31.5	8.5	21	10	96.5	50	18	16	14	6	6900	53
300171	LV.FO-80-14+SJF-M6	80	M6	33	10.5	22	10	130	70	25	16	14	4	6900	91
300172	LV.FO-80-14+SJF-M8	80	M8	33	10.5	22	10	130	70	25	16	14	6	8200	90

### LV.FO-AS+SJF

Code	Description	D	d1	L	L1	d2	h	h1	B	f	f1	s	Articulation Ø	Maximum tightening torque for the screw [Nm]	Max. limit static load* [N]	⚖️
300266	LV.FO-60-14-AS+SJF-M6	60	M6	31.5	34.5	8.5	21	10	96.5	50	18	16	14	4	5800	70
300267	LV.FO-60-14-AS+SJF-M8	60	M8	31.5	34.5	8.5	21	10	96.5	50	18	16	14	6	6900	69
300271	LV.FO-80-14-AS+SJF-M6	80	M6	33	36	10.5	22	10	130	70	25	16	14	4	6900	122
300272	LV.FO-80-14-AS+SJF-M8	80	M8	33	36	10.5	22	10	130	70	25	16	14	6	8200	121

\* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.