

Control knurled knobs

With pointer, Duroplast chrome-plated

MATERIAL


Phenolic based (PF) Duroplast chrome-plated, glossy finish.
Black pad-printed pointer index line, placed at 180° from the transverse pressure screw.

STANDARD EXECUTION

Plain blind hole, fixing by means of a transverse pressure screw according to UNI 5929-85 in AISI 304 stainless steel (headless screw with hexagonal socket and cupped end) which screws into the AISI 304 stainless steel nut. Supplied.



ELESA Original design

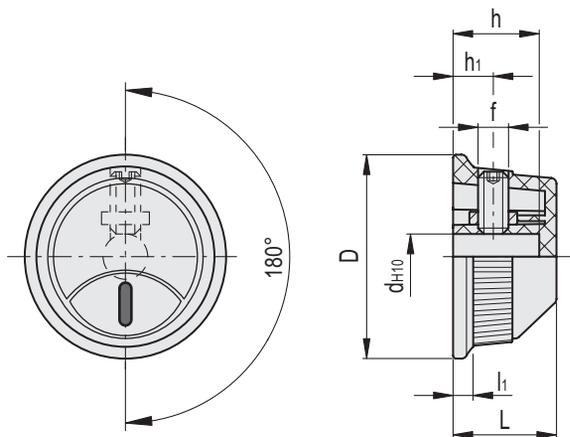

Code	Description	D	dH10	L	li	h	h1	f	⚖
152851	MI.404/35-CR N-6	35	6	18	3,5	15	7	M5	12
152853	MI.404/40-CR N-8	40	8	20,5	4	17,5	7	M5	19
152855	MI.404/45-CR N-8	45	8	23	5	15	10	M5	21