

Tapered handles

Duroplast

MATERIAL

Phenolic based (PF) Duroplast, black colour, glossy finish.

STANDARD EXECUTION

Plain blind hole.


The elastic coupling, by press-fit assembly on h9 tolerance drawn stock bars, is not affected by vibrations and prevents the handle from slipping off (see Technical Data on page A13).

ASSEMBLY INSTRUCTIONS

Fit the handle onto slight chamfered shaft end and push as far as possible by hand or by means of a small press. Alternatively it is possible to tap the handle with a plastic or wooden mallet until firmly in place. In this case we strongly recommend to use a cloth or other suitable soft material over the product to avoid any surface damage.



ELESA Original design

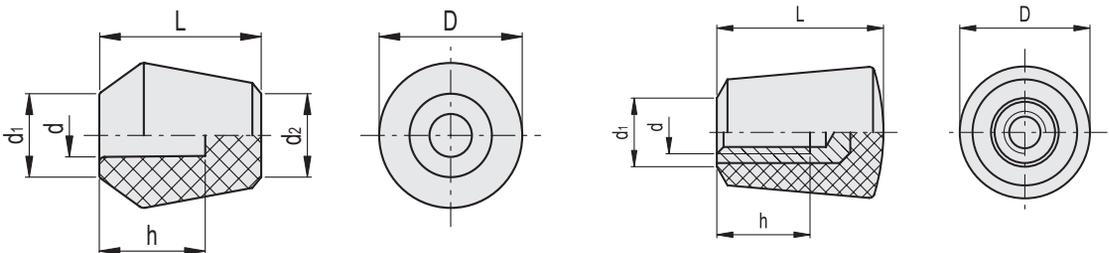

Code	Description	D	L	d	d1	d2	h	⚖
47011	P.390/25-8	25	28	8	15	16	13	12
47111	P.390/30-10	30	34	10	18	19	18	20
47211	P.390/35-12	35	39	12	20	22	20	32
47311	P.390/40-14	40	45	14	23	25	24	47

Code	Description	D	L	d6H	d1	h	⚖
23801	I.307/20 B-M5	15	20	M5	7	12	6
23901	I.307/25 B-M6	20	26	M6	10	16	12
23902	I.307/25 B-M8	20	26	M8	10	15	14
24001	I.307/30 B-M10	25	32	M10	13	17	25