

## Push-fit caps

with retaining chain, fill symbol, technopolymer

### MATERIAL

Polyamide-based (PA) technopolymer, black colour RAL 9005, matte finish.

### ELASTIC FORK

Acetal-based technopolymer (POM), black colour.

### PACKING RINGS

Two NBR synthetic rubber O-rings.

### RETAINING CHAIN

Ball cable and coupling heads in acetal resin based (POM) technopolymer, black colour.  
NERINOX treated stainless steel ring with two coils.  
Head fastening by means of a self-tapping screw  $\varnothing 4.8$  mm UNI EN ISO 7050 or a M5 countersunk-head screw UNI EN ISO 10642.

### STANDARD EXECUTIONS

- **TP-C-LP**: without side hole.
- **TP-CF-LP**: with side breather hole.

### MAXIMUM CONTINUOUS WORKING TEMPERATURE

60°C.

### GRAPHIC SYMBOL "FILL"

According to DIN regulations.

### MOUNTING

Push-fit avoids the need to screw/unscrew.

### FEATURES AND APPLICATIONS


The elastic fork, housed in the special groove of the cap, can rotate freely. The spiral ring connects the fork to the chain.  
Suitable for use when it is necessary to avoid the loss of the cap.

### SPECIAL EXECUTIONS ON REQUEST

- Chain in different lengths.
- Cap with retaining cable CV-T (see page -) in polyethylene black colour.
- Cap with cable in stainless steel GN 111 (see page -), GN 111.2 (see page -), GN 111.4 (see page -), GN 111.8 (see page -).



ELESA Original design

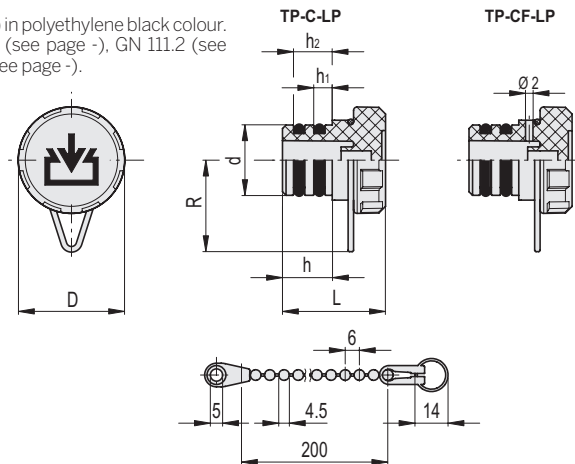

### TP-C-LP

Code	Description	D	d	h	L	R	h <sub>1</sub>	h <sub>2</sub>	Mounting hole d+0.2	
60601-C9	TP-C.12-LP-C9	20	12	11	26	20.5	4	8	12	10
60603-C9	TP-C.18-LP-C9	26	18	13	28	22.5	4.5	10	18	15
60611-C9	TP-C.20-LP-C9	30	20	14	29	24	5	11	20	18
60631-C9	TP-C.26-LP-C9	35	26	14	29.5	26.5	5	11	26	26

### TP-CF-LP

Code	Description	D	d	h	L	R	h <sub>1</sub>	h <sub>2</sub>	Mounting hole d+0.2	
60641-C9	TP-CF.12-LP-C9	20	12	11	26	20.5	4	8	12	10
60643-C9	TP-CF.18-LP-C9	26	18	13	28	22.5	4.5	10	18	15
60651-C9	TP-CF.20-LP-C9	30	20	14	29	24	5	11	20	18
60671-C9	TP-CF.26-LP-C9	35	26	14	29.5	26.5	5	11	26	26