

## Lobe knobs for position indicators

### Technopolymer

#### MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

#### STANDARD EXECUTIONS

Boss H7 reamed hole, fitting to shaft by means of a supplied grub screw with hexagon socket and cup end UNI 5929-85.

- **VHT-GXX**: for gravity indicators.

Black-oxide steel boss.

- **VHT-GXX-SST**: for gravity indicators.

AlSi 303 stainless steel boss.

- **VHT-PXX**: for positive drive indicators.

Rear flange with internal crown gear wheel in acetal resin based (POM) technopolymer. Black-oxide steel screw and anchor pin.

Black-oxide steel boss.

#### FEATURES AND APPLICATIONS

The lobed shape with no cavities prevents unhealthy residues from depositing. Particularly suitable for applications on machines and equipment whose parts must be frequently cleaned by using water jets or steam.

#### INDICATOR CHOICE (TO BE ORDERED SEPARATELY)

To choose the indicator see the table below for possible assembly with indicators.

See also "Assembly instructions" for gravity indicators type G (on page 690) or positive drive indicators type P (on page 692).


#### ACCESSORIES ON REQUEST

Cover CP-XX (see page 715) for fitting instead of the indicator.




ELESA Original design

VHT-GXX  
VHT-GXX-SST

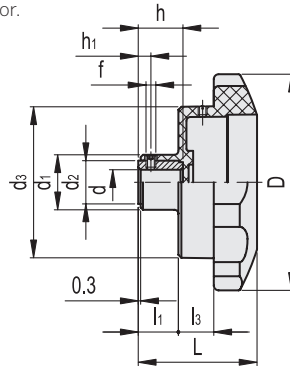

VHT-PXX

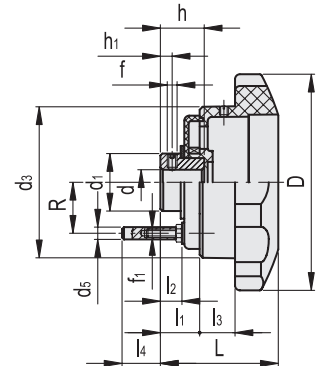

#### VHT-GXX

Code	Description	D	L	dH7	h	d1	d2	d3	f	h1	l1	l3	⚖️	Handwheel indicator combinations
CE.30251	VHT.85-GXX1 A-10	85	51	10	17	24	18	58	M5	6	15.5	18	110	GA01 - GA11
CE.30351	VHT.110-GXX2 A-12	110	58	12	22	28	22	77	M5	6	20	18	180	GA02 - GA12 - GW12

#### VHT-GXX-SST

STAINLESS STEEL

Code	Description	D	L	dH7	h	d1	d2	d3	f	h1	l1	l3	⚖️	Handwheel indicator combinations
CE.30255	VHT.85-GXX1-SST-10	85	51	10	17	24	18	58	M5	6	15.5	18	110	GA01 - GA11
CE.30355	VHT.110-GXX2-SST-12	110	58	12	22	28	22	77	M5	6	20	18	180	GA02 - GA12 - GW12

#### VHT-PXX

Code	Description	D	L	dH7	h	d1	d3	d5	f	f1	h1	l1	l2	l3	l4	R	⚖️	Handwheel indicator combinations
CE.30252	VHT.85-PXX1 A-10	85	55	10	20.5	18	58	6	M5	M4	5	18.5	10.5	18	14.5	19	130	PA01 - PA11
CE.30352	VHT.110-PXX2 A-12	110	58	12	22	30	77	6	M5	M4	6	20	12	18	13.1	28.5	290	PA02 - PA12 - PW12