

Holding bushings

for lifting pins GN 1130

SPECIFICATION

Type

- Type **A**: with external hexagon

Bushing
Stainless Steel

- AISI 630
- precipitation hardened

INFORMATION

Holding bushings GN 1132 are used in connection with lifting pins GN 1130 (see page 1096).

The length l_1 of the holding bushing should be equal to length l_1 of the lifting pin in order to rect the load specification given in the table for GN 1130 at plug-in length x .


Holding bushings intended to remain permanently at the workpiece, creating a place-saving alternative to load rings or similar.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

ON REQUEST

- other threads d_2

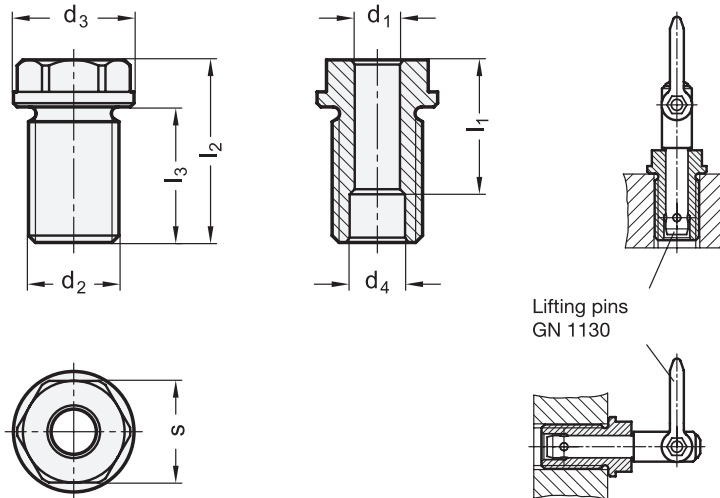

Lifting pins
GN 1130

GN 1132

STAINLESS STEEL

Description	d_1	l_1	d_2	d_3	$d_4 + 0.3$	l_2	l_3	s	Tightening torque in Nm	
GN 1132-8-10-M16x1,5-A	8	10	M 16 x 1.5	24	9.8	27.5	20	19	90	32
GN 1132-8-25-M16-A	8	25	M 16	24	9.8	37.5	25	19	75	47
GN 1132-10-15-M20x1,5-A	10	15	M 20 x 1.5	28	12.2	35.5	24	24	145	70
GN 1132-10-35-M20-A	10	35	M 20	28	12.2	46	29	24	130	92
GN 1132-12-15-M24x1,5-A	12	15	M 24 x 1.5	32	14.7	35.5	24	27	220	94
GN 1132-12-35-M24-A	12	35	M 24	32	14.7	48.5	36	27	200	119
GN 1132-16-25-M30x2-A	16	25	M 30 x 2	39	19.2	44	29	30	440	164
GN 1132-16-50-M30-A	16	50	M 30	39	19.2	66	44	30	400	236
GN 1132-20-50-M36x2-A	20	50	M 36 x 2	43	26	70	55	36	440	236