

Protective guide plates

for latches GN 115, GN 115.7, GN 115.10

SPECIFICATION

Types

- Type **A**: Mounting with countersunk screw
- Type **B**: Mounting with adhesive pad

Plastic (Polyamide PA)
black, matt **SW**

Adhesive pad (only type B)
Scotch-Mount™ 4026
double-sided,
with polyurethane foam backing



INFORMATION

Protective guide plates GN 120.2 are used in connection with door latches, using the principle of friction. They prevent the latch from causing abrasion, for example to corrosion protection layers on a door frame. They additionally prevent unintended opening, as the latches lock into a small recess in their closed position.


If the d2 positioning tabs are not required they can easily be removed with side cutting pliers, for example.

Latches that can be used together with GN 120.2 protective guide plates:


- Latches, lockable GN 115 (see page 1462)
- Latches, not lockable GN 115 (see page 1465)
- Latches with key GN 115 (see page 1468)
- Stainless Steel-Hygienic latches GN 115 (see page 1471)
- Latches with cabinet "U" handle GN 115.7 (see page 1472)
- Latches with gripping tray GN 115.10 (see page 1527)

TECHNICAL INFORMATION


- Plastic characteristics (see page A2)

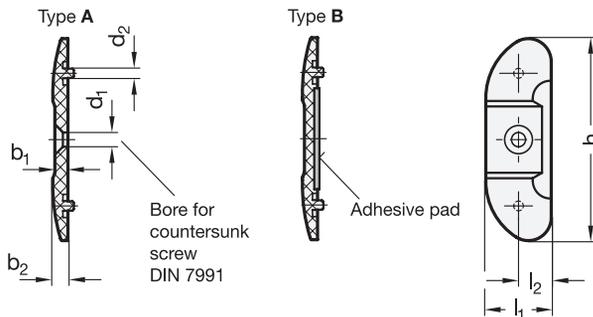

Mounting hole pattern

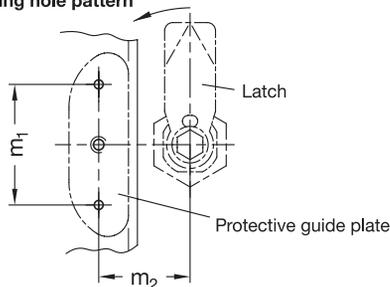

Application example

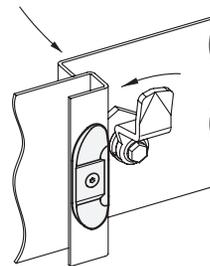

GN 120.2

Description	h	b1	b2	d1	d2	l1	l2	m1	m2 ±2	△
GN 120.2-60-4-A-SW	60	4	4.6	M 4	3	20	10	40	35	6
GN 120.2-60-4-B-SW	60	4	4.6	M 4	3	20	10	40	35	6

