

Two-Way Connector Clamps

Stainless Steel

SPECIFICATION

Types

- Type **A**: Without seals
- Type **B**: With seals

Identification no.

- No. **4**: With 2 stainless steel cap nuts DIN 917

Stainless steel AISI CF-8

Matte shot-blasted

Carriage bolt DIN 603

Stainless steel

Cap nuts DIN 917 / Washers

Stainless steel

Seals

- Sealing disks
Plastic (Polyacetal POM)
- Spacer ring
Silicon, 40 ... 60 Shore A



INFORMATION

The clamping bores of two-way connector clamps GN 132.5 are mechanically machined and designed for construction tubes GN 990 (see page 1902) or DIN 2391, DIN 2395 and DIN 2462.

At the screw locations **z**, carriage bolts and cap nuts reduce the bore cross-section for clamping. Type B is equipped with seals at the screw locations.


For clamping without tools, the cap nuts can be replaced by adjustable hand levers GN 911.3 (see page 1875) listed in the table as accessories.

ACCESSORY

- Adjustable Hand Levers GN 911.3 (see page 1875)

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

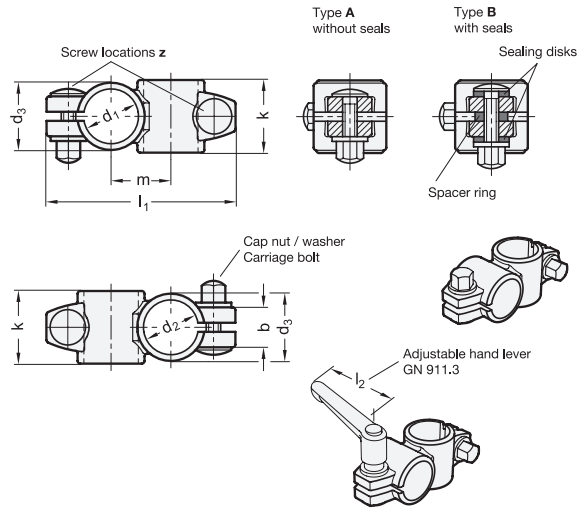

GN 132.5-A

STAINLESS STEEL

Description	d ₁ Bore	d ₂ Bore	b	d ₃	k Clamping length	l ₁	m	z Screw locations	Accessory Recom. hand lever GN 911.3 for z l ₂	⚖
GN 132.5-B30-B30-A-4	B 30	B 30	22	37	40	104	33	M 8	63 78	296
GN 132.5-B40-B40-A-4	B 40	B 40	28	50.3	56	133	45	M 10	78 92	732
GN 132.5-B50-B50-A-4	B 50	B 50	30	60	65	150	53	M 10	78 92	970

GN 132.5-B

STAINLESS STEEL

Description	d ₁ Bore	d ₂ Bore	b	d ₃	k Clamping length	l ₁	m	z Screw locations	Accessory Recom. hand lever GN 911.3 for z l ₂	⚖
GN 132.5-B30-B30-B-4	B 30	B 30	22	37	40	104	33	M 8	63 78	296
GN 132.5-B40-B40-B-4	B 40	B 40	28	50.3	56	133	45	M 10	78 92	732
GN 132.5-B50-B50-B-4	B 50	B 50	30	60	65	150	53	M 10	78 92	970