

Two-Way Connector Clamps

Aluminum

SPECIFICATION

Identification No.

No. **2**: With 2 stainless steel socket cap screws DIN 912

Aluminum

- Powder coated
Black, RAL 9005, textured finish **SW**
- Plain, matte shot-blasted **BL**

Socket cap screws DIN 912

Stainless Steel AISI 304

Hex nuts DIN 985

Stainless Steel AISI 304

Self-locking via polyamide ring



INFORMATION

The clamping bores of two-way connector clamps GN 132 are mechanically machined and designed for construction tubes GN 990 (see page 1902) or DIN 2391, DIN 2395 and DIN 2462.

At the screw locations **z**, the socket cap screws reduce the bore cross-section for clamping.

For clamping without tools, the socket cap screws can be replaced by the adjustable hand levers GN 911 (see page 1874) listed in the table as accessories.

ACCESSORY


- Adjustable Hand Levers GN 911 (see page 1874)

ON REQUEST

- d₁ / d₂ with unequal bores

TECHNICAL INFORMATION

- Stainless Steel Characteristics (see page A26)

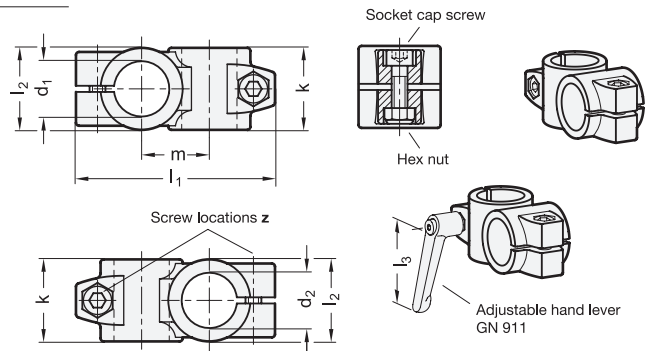

* Complete with

SW **BL**
RAL9005 Plain

GN 132

Description	d ₁ Bore	d ₂ Bore	k Clamping length	l ₁	l ₂	m	z Screw locations	Accessory Recom. hand lever GN 911 for z l ₃	⚖️
GN 132-B20-B20-40-2-*	B 20	B 20	40	97	40	33	M8-25	-	250
GN 132-B25-B25-40-2-*	B 25	B 25	40	97	40	33	M8-25	63 78	240
GN 132-B30-B30-40-2-*	B 30	B 30	40	97	40	33	M8-25	63 78	170
GN 132-B30-B30-56-2-*	B 30	B 30	56	125	56	45	M10-35	-	700
GN 132-B32-B32-56-2-*	B 32	B 32	56	125	56	45	M10-35	-	600
GN 132-B35-B35-56-2-*	B 35	B 35	56	125	56	45	M10-35	78 92	499
GN 132-B40-B40-56-2-*	B 40	B 40	56	125	56	45	M10-35	78 92	450
GN 132-B40-B40-65-2-*	B 40	B 40	65	143	65	53	M10-50	-	880
GN 132-B42-B42-65-2-*	B 42	B 42	65	143	65	53	M10-50	78 92	700
GN 132-B45-B45-65-2-*	B 45	B 45	65	143	65	53	M10-50	78 92	650
GN 132-B48-B48-65-2-*	B 48	B 48	65	143	65	53	M10-50	78 92	600
GN 132-B50-B50-65-2-*	B 50	B 50	65	143	65	53	M10-50	78 92	622
GN 132-B50-B50-80-2-*	B 50	B 50	80	169	80	65	M10-50	-	1230
GN 132-B60-B60-80-2-*	B 60	B 60	80	169	80	65	M10-50	78 92	1060

Weight SW