

T-Angle Connector Clamps

Stainless Steel

SPECIFICATION

Types

- Type **A**: Without seals
- Type **B**: With seals

Identification No.

No. **4**: With 2 stainless steel cap nuts DIN 917

Stainless steel AISI CF-8

Matte shot-blasted

Carriage bolt DIN 603


Stainless steel

Cap nuts DIN 917 / washers

Stainless steel

Seals

- Sealing disks
Plastic (Polyacetal POM)
- Spacer ring
Silicon, 40 ... 60 Shore A

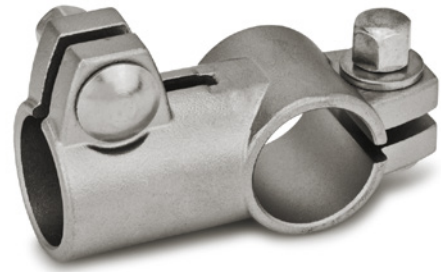

INFORMATION

The clamping bores of T-angle connector clamps 192.5 are mechanically machined and designed for construction tubes GN 990 (see page 1902) or DIN 2391, DIN 2395 and DIN 2462

At the screw locations z1 / z2, carriage bolts and cap nuts reduce the bore cross-section for clamping. Type B is equipped with seals at the screw locations.


For clamping without tools, the cap nuts can be replaced by adjustable hand levers GN 911.3 listed in the table as accessories.

TECHNICAL INFORMATION

- Stainless Steel Characteristics (see page A26)
- Plastic Characteristics (see page A2)

ACCESSORY

- Adjustable Hand Levers GN 911.3 (see page 1875)

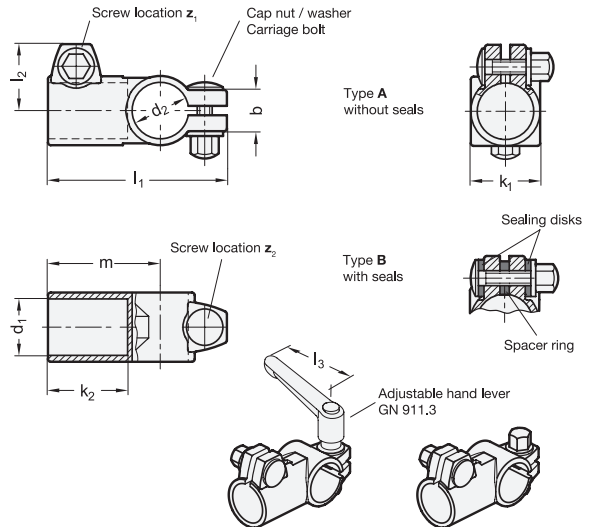

GN 192.5-A

STAINLESS STEEL

Description	d1	d2	b	k1	k2	l1	l2	m	z1 Screw Location	z2 Screw Location	Accessory Recom. hand lever GN 911.3 for z1 I3	Accessory Recom. hand lever GN 911.3 for z2 I3	⚖
GN 192.5-B30-B30-A-4	B 30	B 30	22	37	42	96	35	60	M 8	M 8	63 78	63 78	320
GN 192.5-B50-B50-A-4	B 50	B 50	30	65	75	151.5	48.5	103	M 10	M 10	78 92	78 92	1023

GN 192.5-B

STAINLESS STEEL

Description	d1	d2	b	k1	k2	l1	l2	m	z1 Screw Location	z2 Screw Location	Accessory Recom. hand lever GN 911.3 for z1 I3	Accessory Recom. hand lever GN 911.3 for z2 I3	⚖
GN 192.5-B30-B30-B-4	B 30	B 30	22	37	42	96	35	60	M 8	M 8	63 78	63 78	361
GN 192.5-B50-B50-B-4	B 50	B 50	30	65	75	151.5	48.5	103	M 10	M 10	78 92	78 92	1064