

Screw-on levels

for mounting with screws

SPECIFICATION

Sensitivity

- Type **6**: Angle minutes, bubble move by 2mm
- Type **50**: Angle minutes, bubble move by 2mm

Identification no.

- No. **1**: Viewing window top
- No. **2**: Viewing window top - front
- No. **3**: Viewing window top - front - back

Housing brass

plastic coated, textured finish

black, RAL 9005 **MSW**

silver, RAL 9006 **MSR**

Spirit level element

Glass plastic body

Filling

green-transparent **G**

Casting compound

mineral-based




INFORMATION

Screw-on levels GN 2282 are used to check the horizontal position of jigs, machines, devices, appliances and instruments.

The spirit levels are aligned in relation to the finished reference surface so that the bubble is centered in the middle of the marking lines once the horizontal position of the contact surface in the longitudinal direction is reached.

ON REQUEST

- Filling, colourless-transparent
- Other sensitivities
- Other colours

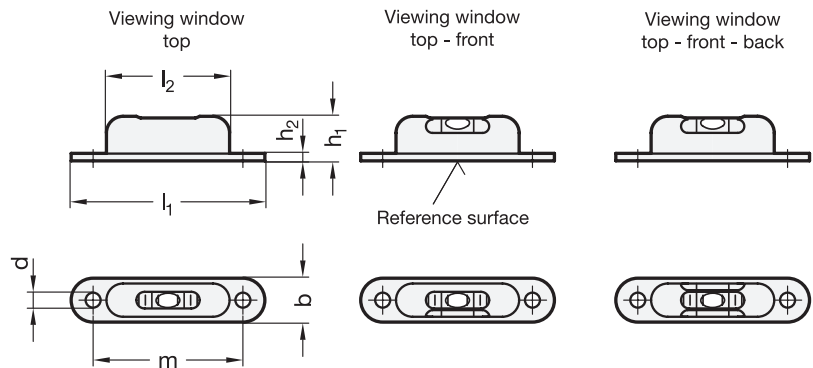

GN 2282

Description	l_1	b	d	h_1	h_2	l_2	m	\triangle
GN 2282-MSW-57-G-6-1	57	12	4.5	13	1	37	45	13
GN 2282-MSR-57-G-6-1	57	12	4.5	13	1	37	45	13
GN 2282-MSW-57-G-6-2	57	12	4.5	13	1	37	45	12
GN 2282-MSR-57-G-6-2	57	12	4.5	13	1	37	45	12
GN 2282-MSW-57-G-6-3	57	12	4.5	13	1	37	45	12
GN 2282-MSR-57-G-6-3	57	12	4.5	13	1	37	45	12
GN 2282-MSW-57-G-50-1	57	12	4.5	13	1	37	45	13
GN 2282-MSR-57-G-50-1	57	12	4.5	13	1	37	45	13
GN 2282-MSW-57-G-50-2	57	12	4.5	13	1	37	45	12
GN 2282-MSR-57-G-50-2	57	12	4.5	13	1	37	45	12
GN 2282-MSW-57-G-50-3	57	12	4.5	13	1	37	45	12
GN 2282-MSR-57-G-50-3	57	12	4.5	13	1	37	45	12