

Threaded flanges

for profile systems

SPECIFICATION




Steel fine casting

- zinc plated, blue passivated **ZB**
- zinc plated and plastic coated black, RAL 9005, textured finish **SW**

INFORMATION

Threaded flanges GN 3490 are used in connection with T-slot profile systems and allow elements to be assembled on or underneath the profiles, e.g. levelling feet.

Depending on the threaded flange, thread size and thread depth dimensions that are available can exceed the dimensions of the profile groove.

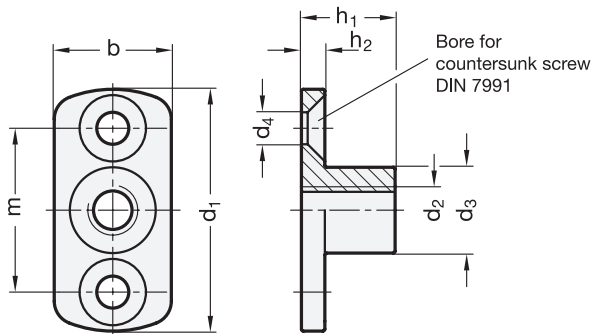

GN 3490

Description	d1	d2	h1	b	d3	d4	h2	m	△
GN 3490-45-M6-16-SW	45	M 6	16	25	15	M 6	6	30	51
GN 3490-45-M6-16-ZB	45	M 6	16	25	15	M 6	6	30	51
GN 3490-45-M8-16-SW	45	M 8	16	25	15	M 6	6	30	108
GN 3490-45-M8-16-ZB	45	M 8	16	25	15	M 6	6	30	108
GN 3490-60-M10-24-SW	60	M 10	24	30	21.5	M 8	6	40	103
GN 3490-60-M10-24-ZB	60	M 10	24	30	21.5	M 8	6	40	103
GN 3490-60-M12-24-SW	60	M 12	24	30	21.5	M 8	6	40	103
GN 3490-60-M12-24-ZB	60	M 12	24	30	21.5	M 8	6	40	103

