

Ledge handles

with lettering block

SPECIFICATION

Aluminium

plastic coated

black, RAL 9005, textured finish **SW**

anodized, natural colour **EL**

Ends

plastic

Technopolymer (Polyamide PA)

black-grey

Lettering block

Insert groove supplied with:

paper strip 200 g/m², width 19.5 mm

bright white, age-resistant

PVC hard film

transparent



INFORMATION

Typical applications for ledge handles with lettering block GN 430.1 include swivel or sliding doors on protective doors and equipment. They are also suitable for use as drawer handles.

The screw channel for screw sizes M6 (extruded aluminium) allows an optional number of fixing screws in any position within the dimension l_2 .

Special lengths can be manufactured from relatively small quantities upwards.

In the design with lettering block, the end cap when delivered is mounted on one side such that the paper / film strip supplied can be lettered and pushed into the groove provided.

The paper strip can also be used as substrate for common lettering tape in widths below 18 mm.

ON REQUEST

- Special lengths
- single paper strips / film strips

TECHNICAL INFORMATION

- Plastic characteristics (see page A2)



MOUNTING INFORMATION

- Minimum screw-in-depth: 10 mm
- Max. load (screw): 400 N
- Max. tightening torque: 4 Nm

* Complete with colour index of the Ledge handles (SW or EL)

SW RAL9005
EL anodized

EXAMPLE OF APPLICATION

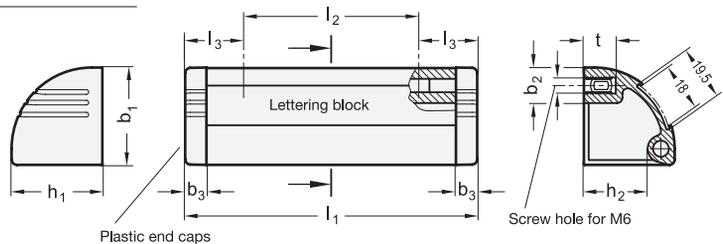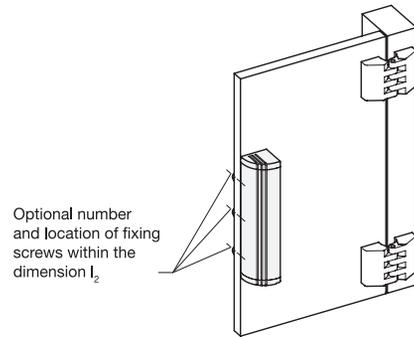

GN 430.1

Description	l1	b1	b2	b3	h1	h2	l2	l3	t	ΔΔ
GN 430.1-110-*	110	36	13	8	34	24	66	22	12	87
GN 430.1-130-*	130	36	13	8	34	24	86	22	12	101
GN 430.1-150-*	150	36	13	8	34	24	106	22	12	140
GN 430.1-200-*	200	36	13	8	34	24	156	22	12	154
GN 430.1-250-*	250	36	13	8	34	24	206	22	12	195
GN 430.1-300-*	300	36	13	8	34	24	256	22	12	234
GN 430.1-400-*	400	36	13	8	34	24	356	22	12	320
GN 430.1-500-*	500	36	13	8	34	24	456	22	12	400

