

Star Knobs

Stainless Steel, Hygienic Design

SPECIFICATION

Stainless steel AISI 316L

- Matte finish (Ra < 0,8 µm) **MT**
- Polished finish (Ra < 0,8 µm) **PL**

Sealing ring

- H-NBR **H**
Temperature resistant -25 °C to +150 °C
- EPDM **E**
Temperature resistant -40 °C to +120 °C
- Blue
- Hardness 85±5 Shore A
- FDA compliant

INFORMATION

Star knobs GN 5435 are intended for use in hygienic areas. The sealed mounting surface enables fastening without dead spaces. The high quality finish and the large corner radii prevent adherence of dirt and facilitate cleaning.

ACCESSORY



- Sealing Rings GN 7600 (see page)

ON REQUEST

- with FKM sealing ring (Fluorine rubber) **F**

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

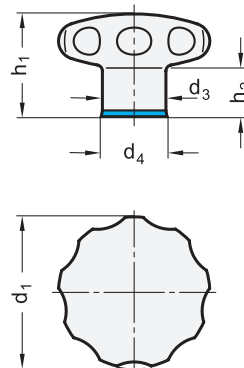

GN 5435-H

STAINLESS STEEL

Description	d1	d2	d3	d4	h1	h2	t min.	△
GN 5435-40-M6-MT-H	40	M 6	18	18.8	30.5	15	12	136
GN 5435-40-M6-PL-H	40	M 6	18	18.8	30.5	15	12	136
GN 5435-40-M8-MT-H	40	M 8	18	18.8	30.5	15	15	132
GN 5435-40-M8-PL-H	40	M 8	18	18.8	30.5	15	15	132
GN 5435-50-M8-MT-H	50	M 8	21	21.8	34	17	15	231
GN 5435-50-M8-PL-H	50	M 8	21	21.8	34	17	15	231
GN 5435-50-M10-MT-H	50	M 10	21	21.8	34	17	18	226
GN 5435-50-M10-PL-H	50	M 10	21	21.8	34	17	18	226

GN 5435-E

STAINLESS STEEL

Description	d1	d2	d3	d4	h1	h2	t min.	△
GN 5435-40-M6-MT-E	40	M 6	18	18.8	30.5	15	12	136
GN 5435-40-M6-PL-E	40	M 6	18	18.8	30.5	15	12	136
GN 5435-40-M8-MT-E	40	M 8	18	18.8	30.5	15	15	132
GN 5435-40-M8-PL-E	40	M 8	18	18.8	30.5	15	15	132
GN 5435-50-M8-MT-E	50	M 8	21	21.8	34	17	15	231
GN 5435-50-M8-PL-E	50	M 8	21	21.8	34	17	15	231
GN 5435-50-M10-MT-E	50	M 10	21	21.8	34	17	18	226
GN 5435-50-M10-PL-E	50	M 10	21	21.8	34	17	18	226