

T-Handles

Aluminum

SPECIFICATION

Aluminum


- Powder coated
 - Black, RAL 9005, textured finish **SW**
 - Silver, RAL 9006, textured finish **SR**
- Plain finish, tumbled **BL**
 - Flash mark not visible

INFORMATION

T-handles GN 563.2 can be used as either operating handles or for clamping purposes, producing high clamping forces. T-handle screws are forged in a die and therefore have a structure with a higher stability and a smooth surface. Original ELESA design, produced in metal in agreement with ELESA S.p.a.

TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)

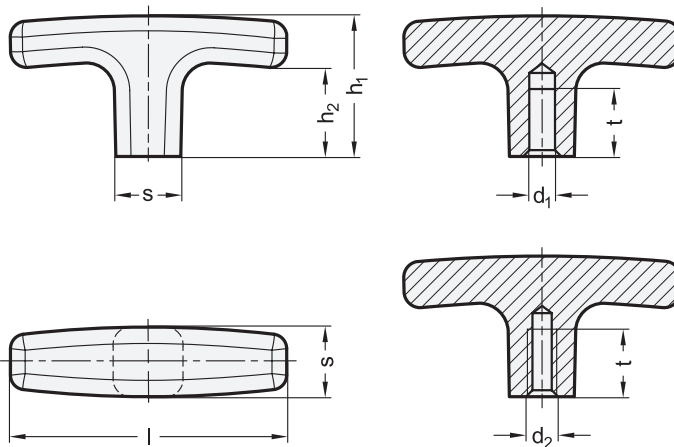

* Complete with

SW
SR
BL
 RAL9005 RAL9006 Plain finish

GN 563.2

Description	Length l	d1: H7 Bore	d2 Thread	h1	h2	s Square	t min.	Δ±
GN 563.2-55-B6-*	55	B 6	-	33	22	14	12	30
GN 563.2-55-M6-*	55	-	M 6	33	22	14	12	33
GN 563.2-55-M8-*	55	-	M 8	33	22	14	12	35
GN 563.2-67-B8-*	67	B 8	-	37	25	16	16	45
GN 563.2-67-M8-*	67	-	M 8	37	25	16	16	48
GN 563.2-80-B8-*	80	B 8	-	41	26	20	16	80
GN 563.2-80-M8-*	80	-	M 8	41	26	20	16	82
GN 563.2-80-M10-*	80	-	M10	41	26	20	16	85

Weight SW