

## Cabinet U-handles

with polyurethane foam rubber

### SPECIFICATION

Sheathing

Thermoplastic polyurethane (TPU)

- black, matt textured finish
- elastic, 65 ±5 shore A
- temperature resistant up to 70 °C
- abrasion-resistant
- insulating
- weather-proof

Handle core

Stainless Steel AISI 303

round (for size b = 25)

Aluminum

elliptical (for size b = 35)

### INFORMATION

The shock absorbing casing of the GN 564 cabinet U-handles made of thermoplastic polyurethane (TPU) offers protection from injuries, while its elliptical shape gives it a nice hold.


The Stainless Steel core and the aluminum core guarantee a high basic durability of the handle.

### TECHNICAL INFORMATION

- Load rating information (see page A35)
- Elastomer characteristics (see page A32)
- Stainless Steel characteristics (see page A26)

### ON REQUEST

- other colors

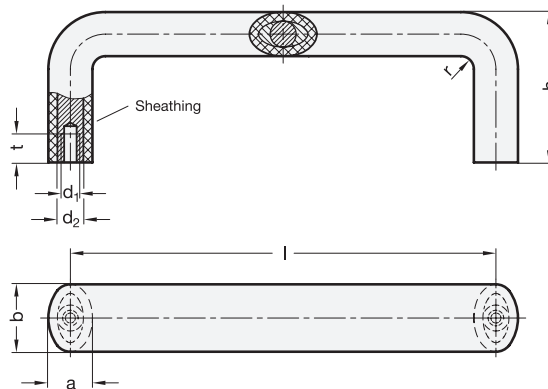

### GN 564

Description	b	l ±0.25	a	d1	d2	h	r	t min.	⚖
GN 564-25-112	25	112	16	M 6	10	50	5	10	160
GN 564-25-128	25	128	16	M 6	10	54	7	10	174
GN 564-25-160	25	160	16	M 6	10	54	9	10	199
GN 564-25-192	25	192	16	M 6	10	54	9	10	215
GN 564-35-160	35	160	25	M 8	17	68	12.5	12	328
GN 564-35-192	35	192	25	M 8	17	68	12.5	12	370
GN 564-35-300	35	300	25	M 8	17	68	12.5	12	513

