

Clamping indexing plungers

with safety function

SPECIFICATION

Knurled knob
Plastic (Polyamide PA)
black, matt

Cover
Plastic (Polyamide PA)
light grey, matt

Fixing thread
Steel zinc plated, blue passivated

Plunger pin
Steel nitrided and blackened

INFORMATION


Clamping indexing GN 7336.8 plungers are an advanced development of the GN 7336.7 clamping knobs with indexing plunger.

Like the latter, they are used for positioning, securing and clamping adjusting elements at the same time. This configuration ensures that the indexing pin cannot be pulled from the indexing bore by turning the knurled knob, but only be deliberately pulling the handle (safety function).


- Range of indexing plungers (see page 738)

TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)
- Plastic characteristics (see page A2)
- Load rating information (see page A42)

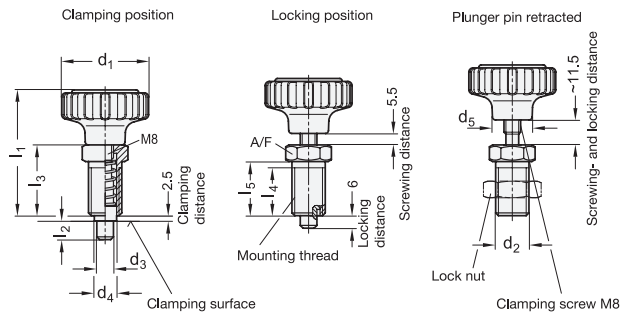

Application example

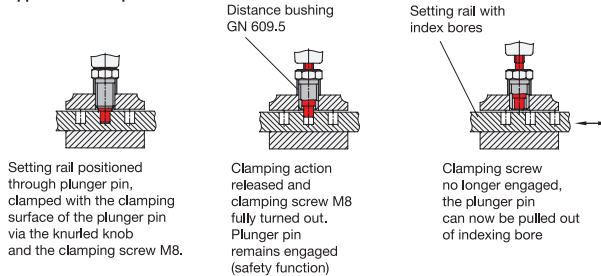

GN 7336.8

Description	d1	d2	d3 Pin -0.02/-0.04 Bore G7	d4	d5	l1	l2	l3	l4 min.	l5	A/F	Spring load in N ≈ initial	Spring load in N ≈ end	⚖️
GN 7336.8-42-M16x1,5-6	42	M 16 x 1,5	6	11	19	60	9	34	23	26	19	14	26	90
GN 7336.8-42-M16x1,5-8	42	M 16 x 1,5	8	11	19	60	9	34	23	26	19	14	26	96
GN 7336.8-53-M16x1,5-6	53	M 16 x 1,5	6	11	24	66	9	34	23	26	19	14	26	120
GN 7336.8-53-M16x1,5-8	53	M 16 x 1,5	8	11	24	66	9	34	23	26	19	14	26	120

