

## Cylindrical Revolving handles

Spindle steel, zinc plated

### SPECIFICATION

Plastic **KT**

Technopolymer

- temperature resistant up to 90 °C
- black, matt finish

Aluminium **AL**

polished

Spindle Steel

zinc plated, blue passivated




### INFORMATION

Typical in design are the revolving handles GN 798 with their stepped shape consisting of two cylinders giving the operator a better grip.

### TECHNICAL INFORMATION

- Plastic characteristics (see page A2)

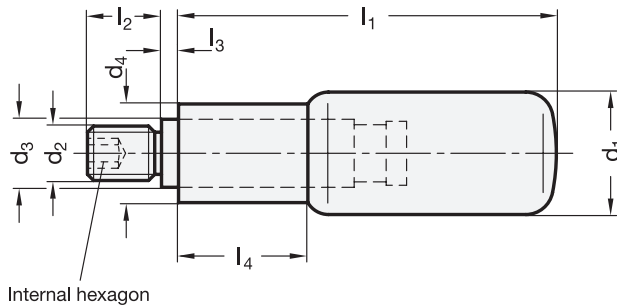

\* Complete with material of the Revolving handles (KT or AL)

**KT**    **AL**  
Plastic    Aluminium

### GN 798

Description	d1	d2	d3	d4	l1	l2	l3	l4	⚖
GN 798-*-16-M6	16	M 6	10	13	41.5	12	25	15	40
GN 798-*-18-M6	18	M 6	10	14.5	56	13	25	19	50
GN 798-*-18-M8	18	M 8	10	14.5	56	13	25	19	40
GN 798-*-22-M10	22	M 10	14	18.5	59	14	25	21	103
GN 798-*-22-M6	22	M 6	14	18.5	59	14	25	21	100
GN 798-*-22-M8	22	M 8	14	18.5	59	14	25	21	101
GN 798-*-24-M10	24	M 10	14	18.5	74	16	25	27	115
GN 798-*-24-M8	24	M 8	14	18.5	74	16	25	27	120
GN 798-*-25-M10	25	M 10	16	20	84	16	25	30	150

Weight AL

