

Connecting sets X-Y

for adjustable slide units GN 900


SPECIFICATION

Aluminium
anodized, natural colour
Socket head cap screws DIN 912
Stainless Steel



INFORMATION

With connecting sets GN 900.2 two adjustable slide units GN 900 (see page 668) can be combined to produce an X-Y axis configuration.

This combination is achieved with a clamping system which eliminates the use of any kind of fixing holes in the slide.
The stationary base of the second adjustable slide unit is clamped on to the slide of the first unit to give the X-Y configuration. The slides on both units together give the X-Y movement.
The small fixing plate serves for the 90° alignment and fine adjustment of the XY-axis configuration.
All parts required to make up a set are included.

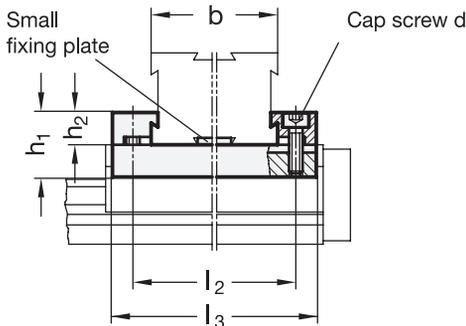

Mounting example

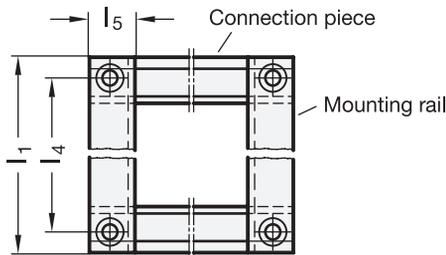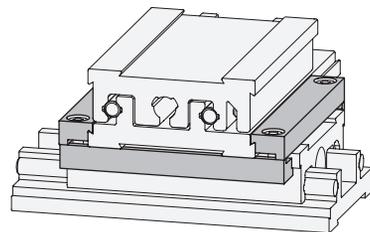

GN 900.2

Description	b Size of the slide	l ₁	d	h ₁	h ₂	l ₂	l ₃	l ₄	l ₅	⚖
GN 900.2-30-41	30	41	M 2.5	8.4	4.2	35.4	41	35.4	6.5	12
GN 900.2-50-67	50	67	M 3	14	7	58	67	58	10	49
GN 900.2-80-105	80	105	M 4	25	12.5	92	105	92	14.5	186
GN 900.2-120-145	120	145	M 5	27.6	13.8	131.8	145	131.8	14.5	323

