

Double cam levers

SPECIFICATION

- Steel
- ST 52-3 / German Material No. 1.0570
- blackened
- King pin
- Stainless Steel AISI 420
- tempered
- Safety circlip DIN 471
- Stainless Steel AISI 301
- Plastic cover
- red, oil resistant
- temperature resistant up to 60 °C

INFORMATION

Double cam levers GN 917 are used for repositioning and clamping. The eccentric cam has the advantage that the clamping force remains constant in every position of its travel and in addition is self arresting.

The dimension b_2 is made to match the head size of swing bolts DIN 444 (see page) and swing nuts GN 444.2 (see page) respectively.

Stainless Steel-Double cam levers

SPECIFICATION

- Stainless Steel AISI 304
- shot-blasted
- King pin
- Stainless Steel AISI 420
- tempered
- Safety circlip DIN 471
- Stainless Steel AISI 301
- Plastic cover
- red, oil resistant
- temperature resistant up to 60 °C



INFORMATION

Double cam levers GN 917.1 are used for repositioning and clamping. The eccentric cam has the advantage that the clamping force remains constant in every position of its travel and in addition is self arresting.

The dimension b_2 is made to match the head size of swing bolts DIN 444 (see page) and swing nuts GN 444.2 (see page) respectively.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page)

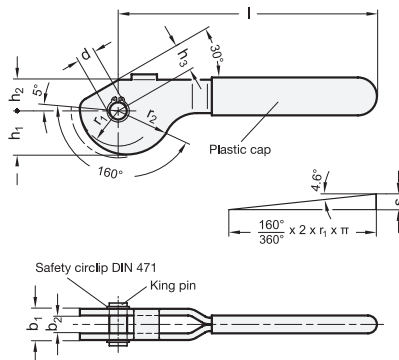

GN 917

Description	d	b1	b2	h1	h2	h3	l	r1	r2	s	r2-h3	△
GN 917-8-13	8	13	9	19.54	14	12	114	17.2	21.07	3.87	9.07	85
GN 917-10-17	10	17	12	24.54	17	15	138	21.6	26.45	4.85	11.45	170
GN 917-12-20	12	20	14	31.81	21	18	157	28	34.29	6.29	16.29	285

GN 917.1

STAINLESS STEEL

Description	d	b1	b2	h1	h2	h3	l	r1	r2	s	r2-h3	△
GN 917.1-8-13	8	13	9	19.54	14	12	114	17.2	21.07	3.87	9.07	86
GN 917.1-10-17	10	17	12	24.54	17	15	138	21.6	26.45	4.85	11.45	165
GN 917.1-12-20	12	20	14	31.81	21	18	157	28	34.29	6.29	16.29	272

