

Wipers

for Stainless Steel Cam Roller Linear Guide Rails GN 2492

SPECIFICATION

Type

- Type **K**: Compact design

Coding

- **X**: For fixed bearing guide rail

Wipers

Polyurethane (TPU)

Blue, FDA compliant

Operating temperature -20 °C to 100 °C



INFORMATION

Wipers GN 2498 protect against dirt deposits in stainless steel cam roller linear guide rails GN 2492 (see page) and stainless steel cam rollers GN 2496 (see page).


The wipers are provided as a replacement part for cam roller carriage GN 2494 (see page) to allow easy exchange in case of wear. Alternatively, they can be used on custom-built cam roller carriages. Based on the dimensions of the rectangular cutout designated for fastening them to the cam roller carriage.

The material can also be used in special environments that can be found, for example, in the pharmaceutical and food processing industries.


The wipers can be manually pushed onto the provided retaining tabs on the cam roller carriages and prepositioned. When inserting the carriage into the guide rail, check the position and adjust if necessary. The wipers will automatically assume proper alignment during operation.

TECHNICAL INFORMATION

- Elastomer characteristics (see page A32)

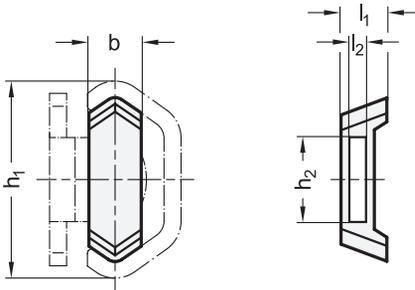

Mounting example

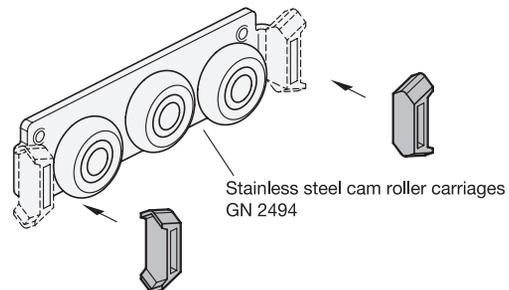

GN 2498

Description	h1 GN 2492	b	h2	l1	l2	⚖
GN 2498-30-K-X	30	8	10	8	3	10
GN 2498-45-K-X	45	12.5	20	11	4	12