

## Stainless Steel-Grub screws

with ball point for Thrust pads GN 631 / GN 631.5

### SPECIFICATION

Stainless Steel AISI 303

### INFORMATION


Grub screws GN 632.5 with ball point are as a rule used with thrust pads GN 631 (see page 940) / GN 631.5 (see page 941).

The ball- $\varnothing d_2$  is smaller than the thread core- $\varnothing$ , which allows fitting over the ball end.


The combination of grub screws GN 632.5 and thrust pads GN 631 / GN 631.5 with gripping elements easily makes clamping screws of many different types.

### TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)
- Strength values of screws (see page A20)

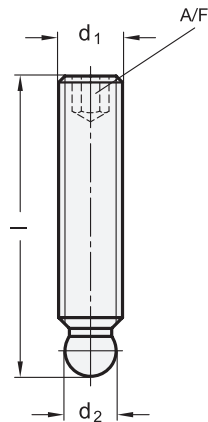

Mounting example



### GN 632.5

STAINLESS STEEL

Description	d1	l	d2	A/F	Thrust pad GN 631 / GN 631.5 d1 - e	⚖
GN 632.5-M6-30	M 6	30	4.5 ±0.025	3	15 - 3.6   18 - 5.2   21 - 6   25 - 6.5   32 - 7	5
GN 632.5-M6-40	M 6	40	4.5 ±0.025	3	15 - 3.6   18 - 5.2   21 - 6   25 - 6.5   32 - 7	8
GN 632.5-M6-50	M 6	50	4.5 ±0.025	3	15 - 3.6   18 - 5.2   21 - 6   25 - 6.5   32 - 7	10
GN 632.5-M8-25	M 8	25	6.1 +0.05	4	15 - 2.5   18 - 4.2   21 - 5   25 - 5.5   32 - 6   40 - 8   50 - 1.4	6
GN 632.5-M8-40	M 8	40	6.1 +0.05	4	15 - 2.5   18 - 4.2   21 - 5   25 - 5.5   32 - 6   40 - 8   50 - 1.4	8
GN 632.5-M8-50	M 8	50	6.1 +0.05	4	15 - 2.5   18 - 4.2   21 - 5   25 - 5.5   32 - 6   40 - 8   50 - 1.4	14
GN 632.5-M8-63	M 8	63	6.1 +0.05	4	15 - 2.5   18 - 4.2   21 - 5   25 - 5.5   32 - 6   40 - 8   50 - 1.4	15
GN 632.5-M10-40	M 10	40	7.8 +0.05	5	18 - 3.8   21 - 4.3   25 - 4.6   32 - 5   40 - 7   50 - 9.3	17
GN 632.5-M10-50	M 10	50	7.8 +0.05	5	18 - 3.8   21 - 4.3   25 - 4.6   32 - 5   40 - 7   50 - 9.3	21
GN 632.5-M10-63	M 10	63	7.8 +0.05	5	18 - 3.8   21 - 4.3   25 - 4.6   32 - 5   40 - 7   50 - 9.3	35
GN 632.5-M10-80	M 10	80	7.8 +0.05	5	18 - 3.8   21 - 4.3   25 - 4.6   32 - 5   40 - 7   50 - 9.3	44
GN 632.5-M12-40	M 12	40	9.4 +0.05	6	21 - 3.4   25 - 3.6   32 - 4.2   40 - 6.2   50 - 8.7	20
GN 632.5-M12-63	M 12	63	9.4 +0.05	6	21 - 3.4   25 - 3.6   32 - 4.2   40 - 6.2   50 - 8.7	40
GN 632.5-M12-80	M 12	80	9.4 +0.05	6	21 - 3.4   25 - 3.6   32 - 4.2   40 - 6.2   50 - 8.7	48
GN 632.5-M12-100	M 12	100	9.4 +0.05	6	21 - 3.4   25 - 3.6   32 - 4.2   40 - 6.2   50 - 8.7	60

